




Hercules Monolithic

Trim Style

Part # UL 3335/3337

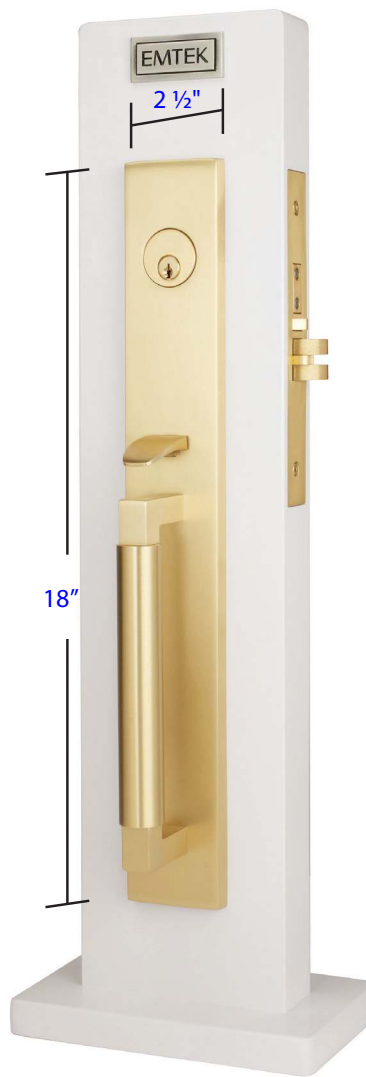

Hercules Full Length

Trim Style

Part # UL 3336/3338



Standard interior trim

Part # UL 3335, 3336, 3337, 3338

Additional Dimensions: (Part# UL 3335, 3336, 3337, 3338)

- Exterior Projection is 2 1/2"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1"
- Clearance between door & grip is 1 1/2" - 1 7/8"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate



Mormont
Trim Style
Part # UL 3347



Lugano
Trim Style
Part # UL 3348

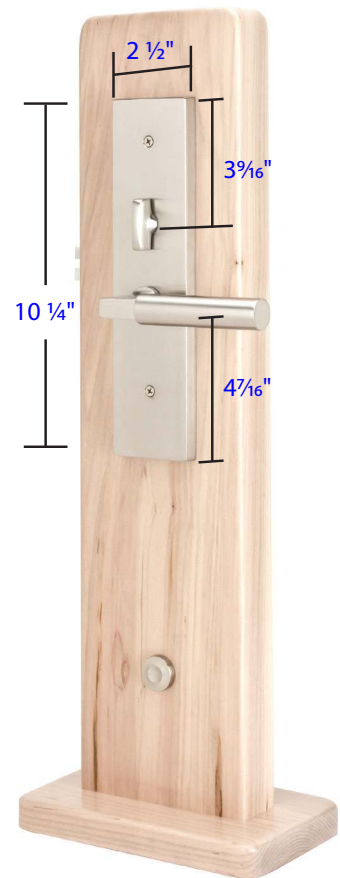

Standard interior trim
Part # UL 3347 & 3348

Additional Dimensions: (Part# UL 3347 & 3348)

- Exterior Projection is 2 1/2"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1"
- Clearance between door & grip is 1 1/2" - 1 7/8"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate



Brisbane
Trim Style
Part # UL 3311



Adelaide
Trim Style
Part # UL 3312

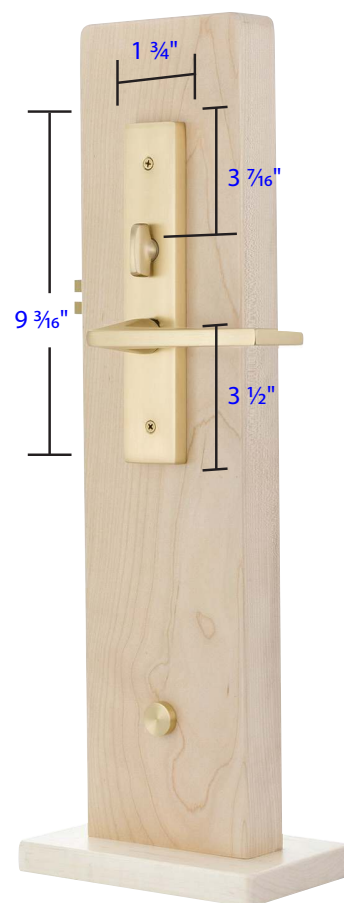

Standard interior trim
Part # UL 3311 & 3312


Additional Dimensions: (Part# UL 3311 & 3312)

- Exterior Projection is 2 1/2"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1"
- Clearance between door & grip is 1 1/2" - 1 7/8"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate

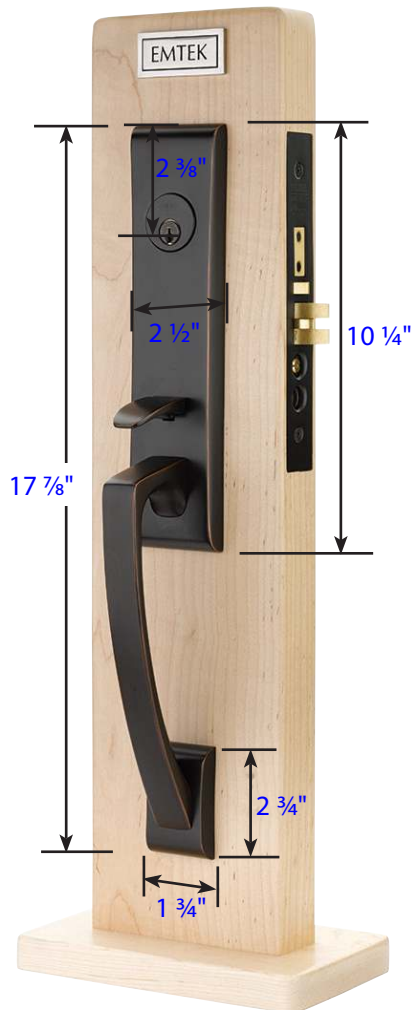

Artemis
Trim Style
Part # UL 3344



Hera
Trim Style
Part # UL 3345

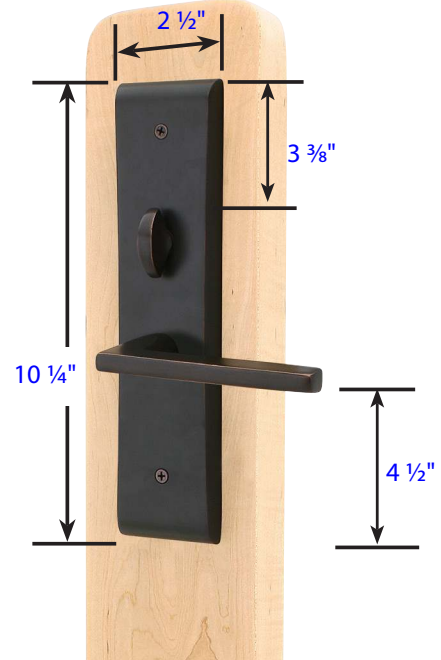

Standard interior trim
Part # UL 3344 & 3345


Additional Dimensions: (Part# UL 3344 & 3345)

- Exterior Projection is 2 3/4"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1"
- Clearance between door & grip is 2 1/4"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate

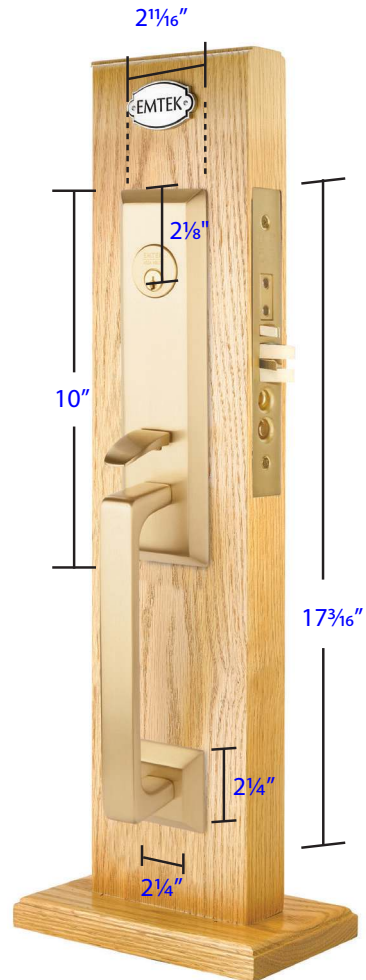

Transitional Heritage

Trim Style
Part # UL 3339

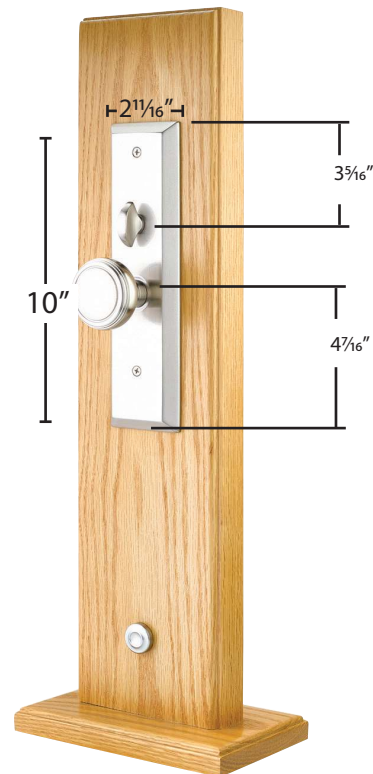

Standard interior trim
Part # UL 3339

Additional Dimensions: (Part# UL 3339)

- Exterior Projection is 2 1/2"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1"
- Clearance between door & grip is 1 1/2" - 1 7/8"
- Plates thickness: 1/2"

Same dimensions for dummy function



Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate



Mormont Stainless Steel

Trim Style
Part # UL S3301



Standard interior trim
Part # UL S3301

Additional Dimensions: (Part# UL S3301)

- Exterior Projection is 2 3/4"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1"
- Clearance between door & grip is 1" - 1 3/4"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate



Harrison
Trim Style
Part # UL 3351



Middleton
Trim Style
Part # UL 3352

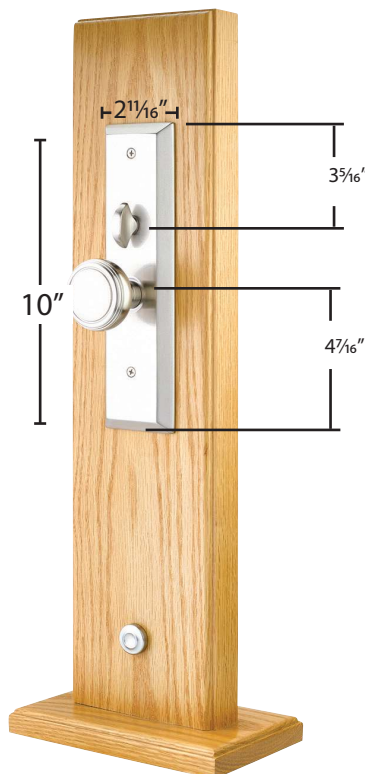

Standard interior trim
Part # UL 3351 & 3352


Additional Dimensions: (Part # UL 3351 & 3352)

- Exterior Projection is 2 3/4"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 1/4"
- Clearance between door & grip is 2"
- Plates thickness: 1/2"

Same dimensions for dummy function



Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate

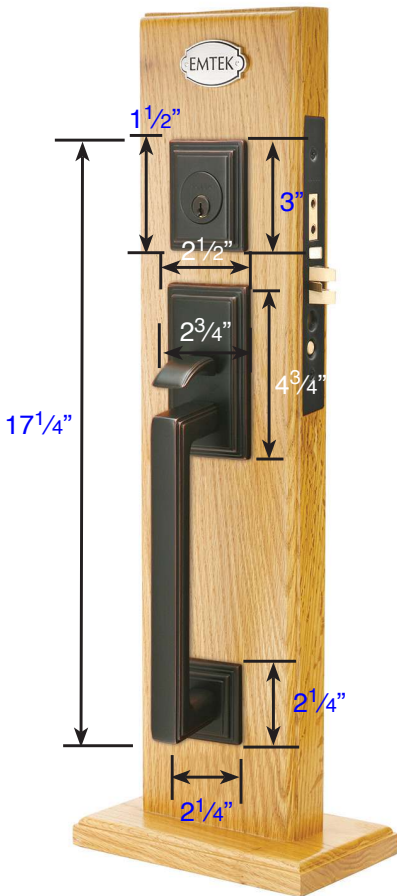**Mills**

Trim

Part # UL 3310

DISCONTINUED**Manhattan**


Trim Style

Part # UL 3306

**Melrose**

Trim Style


Part # UL 3305

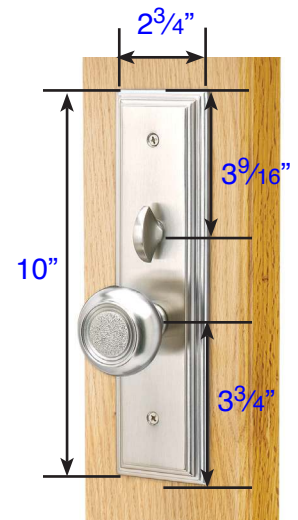Standard interior trim
Part # UL 3310, 3306 & 3305**Additional Dimensions:** (Part # UL 3310, 3306 & 3305)


- Exterior Projection is 2 5/8"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1"
- Clearance between door & grip is 1 3/8"
- Plates thickness: 1/2"

Same dimensions for dummy function


Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate

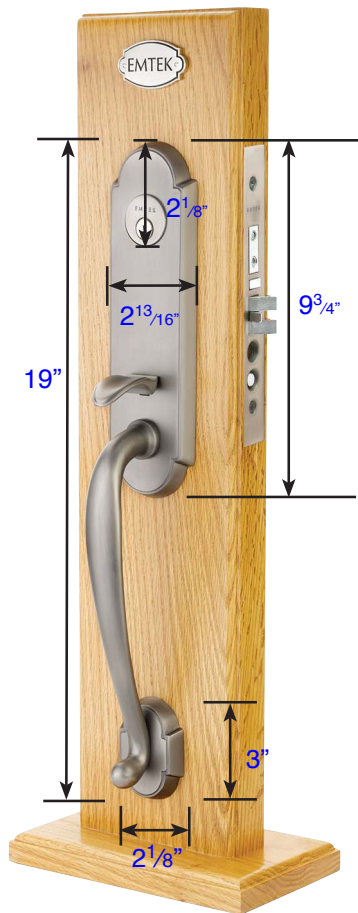

Charleston
Trim Style
Part # UL 3343

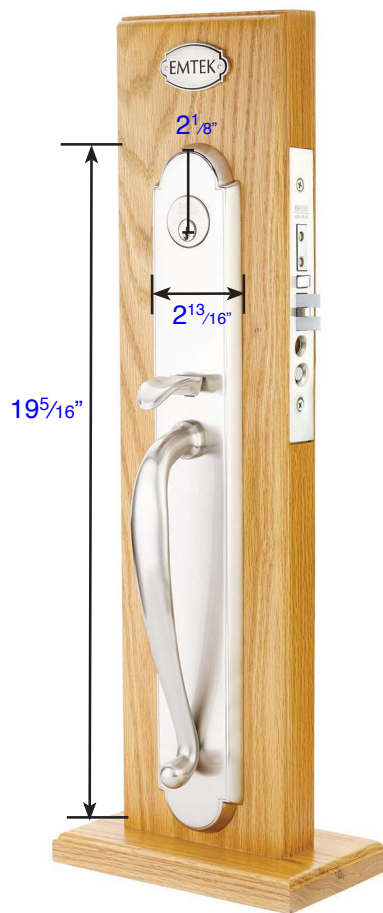

Albany
Trim Style
Part # UL 3350

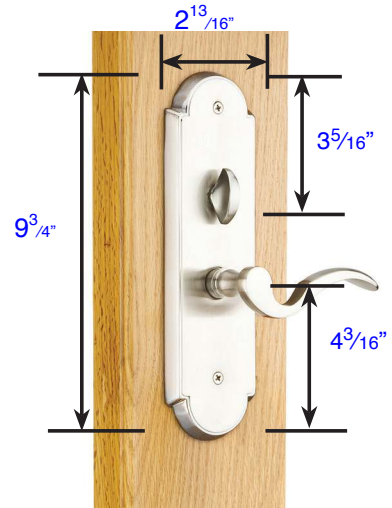

Standard interior trim
Part # UL 3343 & 3350


Additional Dimensions: (Part# UL 3343 & 3350)

- Exterior Projection is 2 3/4"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 1/4"
- Clearance between door & grip is 2"
- Plates thickness: 1/2"


Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate

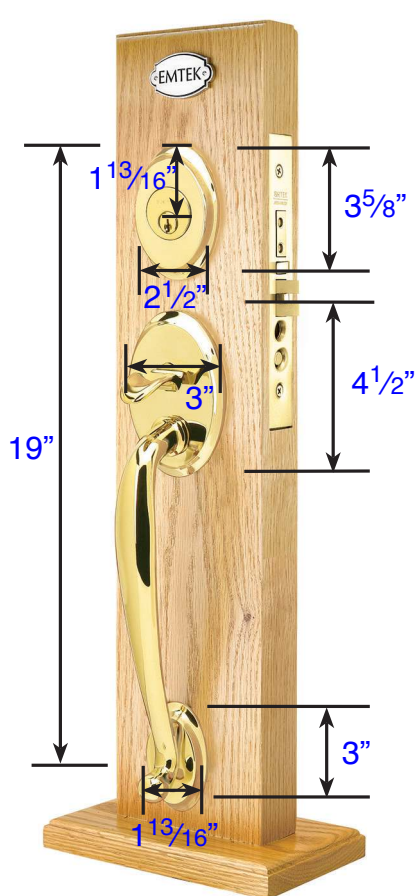

Salem
Trim Style
Part # UL 3301
DISCONTINUED

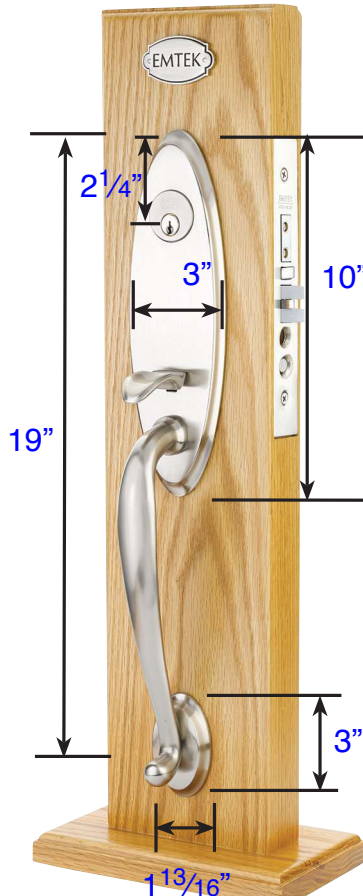

Memphis
Trim Style
Part # UL 3302

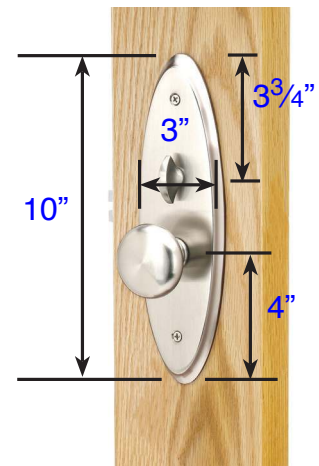

Standard interior trim
Part # UL 3301 & 3302


Additional Dimensions: (Part # UL 3301 & 3302)

- Exterior Projection is 2 3/4"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 1/4"
- Clearance between door & grip is 2"
- Plates thickness: 1/2"

Same dimensions for dummy function



Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate

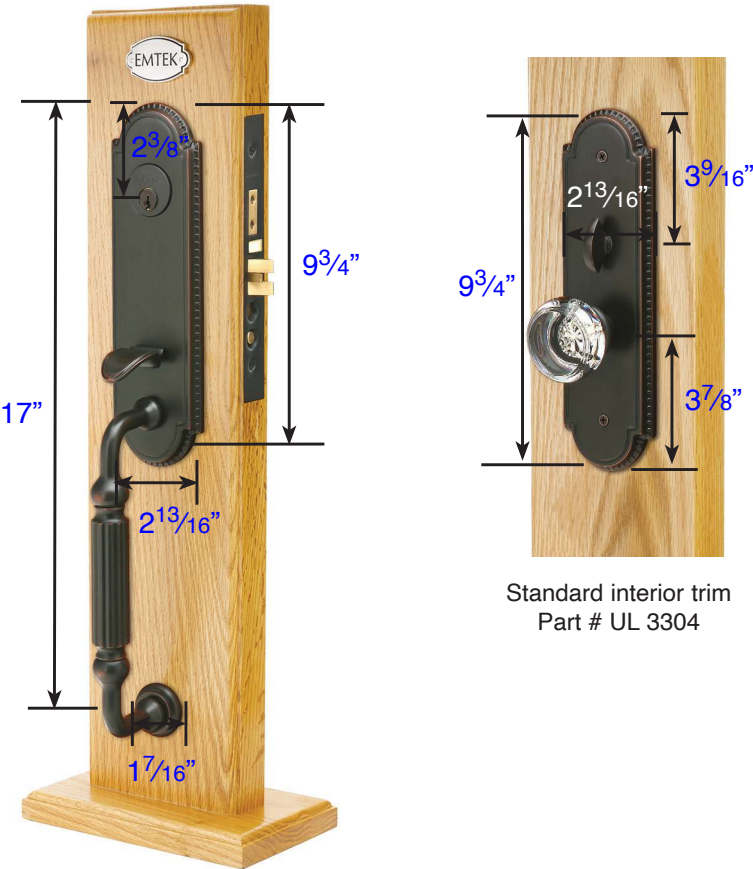


Hamilton
Trim Style
Part # UL 3304

- Additional Dimensions:** (Part # UL 3304)
- Exterior Projection is 2 7/8"
 - Interior Projection Depends on Handle Style
 - Overall Grip thickness: 1 1/4"
 - Clearance between door & grip is 1 1/2"
 - Plates thickness: 1/2"
- Same dimensions for dummy function**




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate

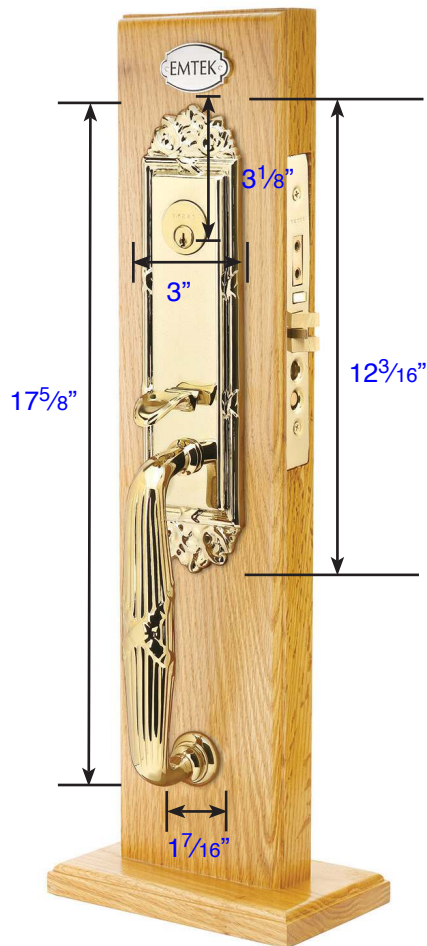

Regency
Trim Style
Part # UL 3307



Versailles
Trim Style
Part # UL 3309

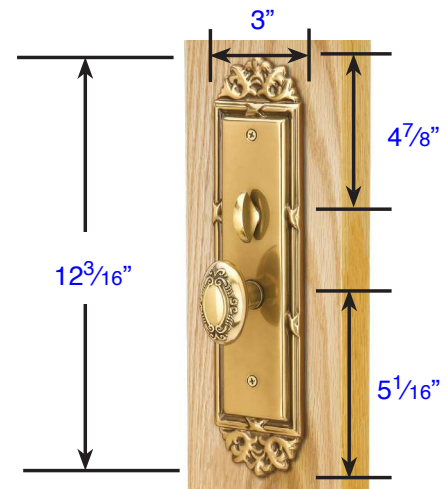

Standard interior trim
Part # UL 3307 & 3309

Additional Dimensions: (Part # UL 3307 & 3309)

- Exterior Projection is 2 3/4"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 3/8"
- Clearance between door & grip is 1 1/16"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 3/4" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate



Craftsman
Trim Style
Part # UL 3308

Craftsman Full Length
Trim Style
Part # UL 3349

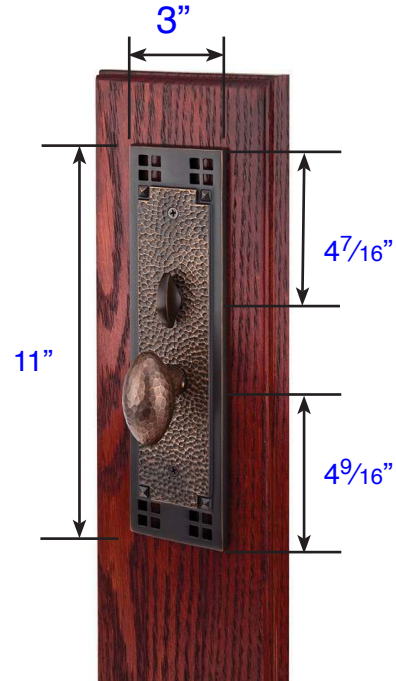

Standard Interior Trim
Part # UL 3308 & 3349


Additional Dimensions: (Part # UL 3308 & 3349)

- Exterior Projection is 2 $\frac{5}{8}$ "
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 $\frac{1}{8}$ "
- Clearance between door & grip is 1 $\frac{3}{8}$ "
- Plates thickness: $\frac{1}{2}$ "


Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 $\frac{3}{4}$" Standard Components: • 1 $\frac{3}{8}$" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 $\frac{1}{2}$" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 $\frac{7}{8}$" - 2 $\frac{1}{4}$" Extended Components: • 1 $\frac{1}{2}$" Threaded Cylinder • 2" Long Spindle • 2 $\frac{1}{2}$" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 $\frac{3}{8}$" - 2 $\frac{3}{4}$" Extended Components: • 1 $\frac{3}{4}$" Threaded Cylinder • 2 $\frac{1}{4}$" Long Spindle • 2 $\frac{1}{2}$" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate

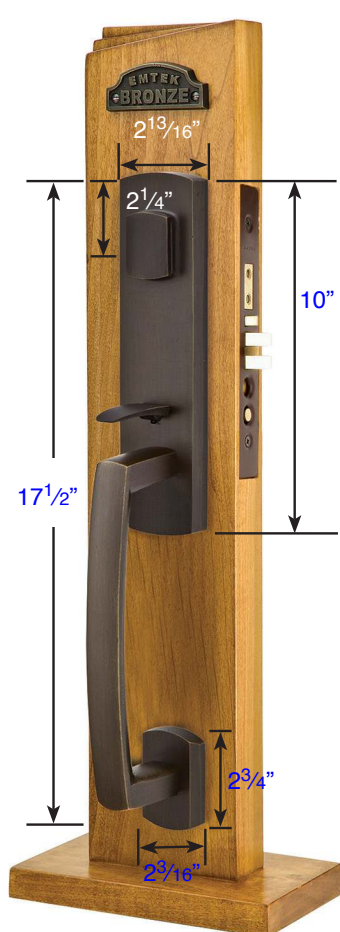

Sonoma
Trim Style
Part # UL 3329

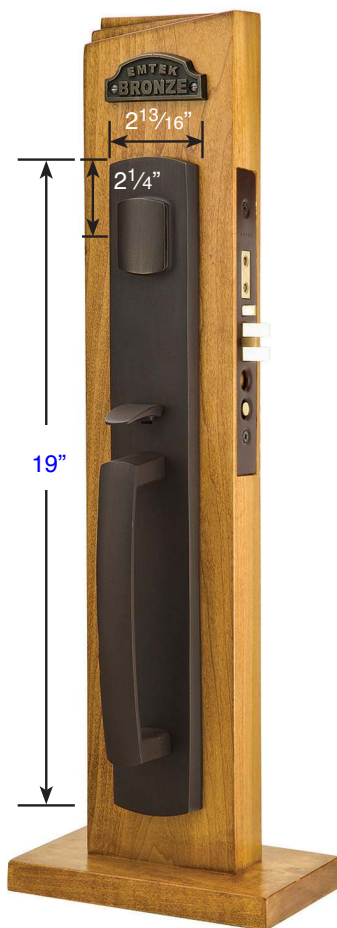

Longmont
Trim Style
Part # UL 3330

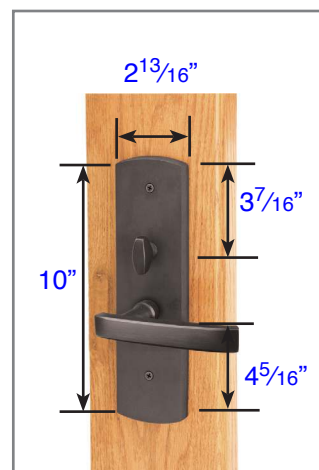

Standard Interior Trim
Part # UL 3329 & 3330


Additional Dimensions: (Part # UL 3329 & 3330)

- Exterior Projection is 3 1/8"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 3/4"
- Clearance between door & grip is 1 3/4"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 5/8" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • 2 3/4" TD Requires 2" Threaded Cylinder

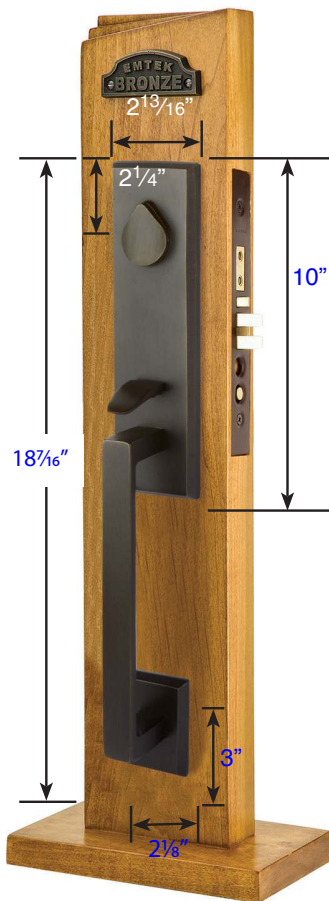**Rustic Modern Rectangular**

Trim Style

Part # UL 3340

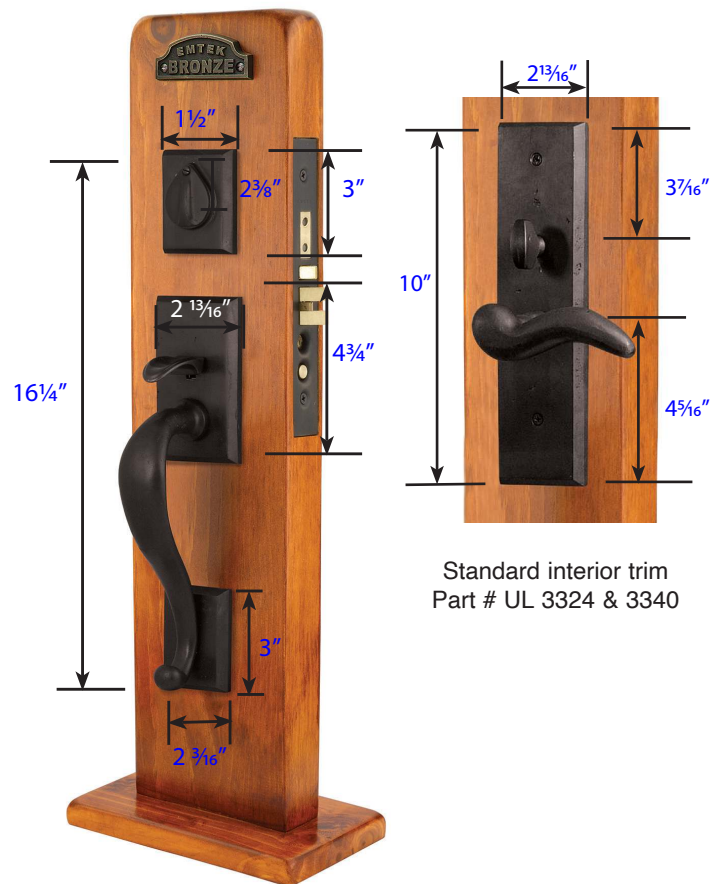**Rectangular Sectional**

Trim Style

Part # UL 3324


Standard interior trim
Part # UL 3324 & 3340

Additional Dimensions: (Part # UL 3340 & 3324)


- Exterior Projection is 3 3/8"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 3/4"
- Clearance between door & grip is 1 3/4"
- Plates thickness: 1/2"

Same dimensions for dummy function


Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 5/8" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • 2 3/4" TD Requires 2" Threaded Cylinder

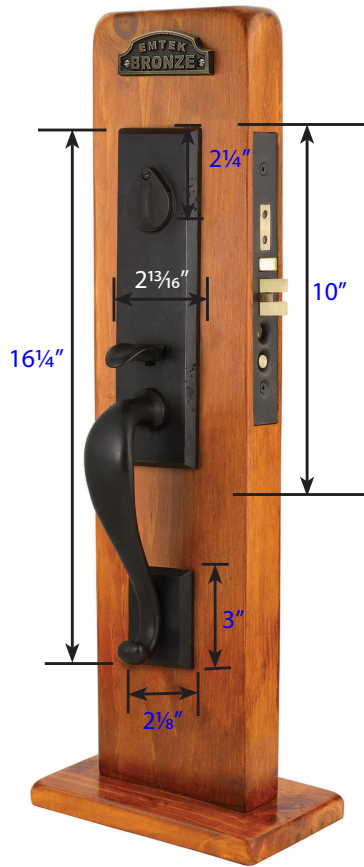

Rectangular Monolithic
Trim Style
Part # UL 3325

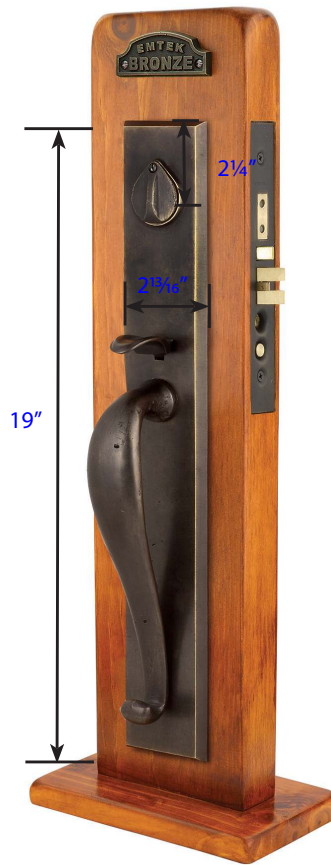

Rectangular Full Length
Trim Style
Part # UL 3326

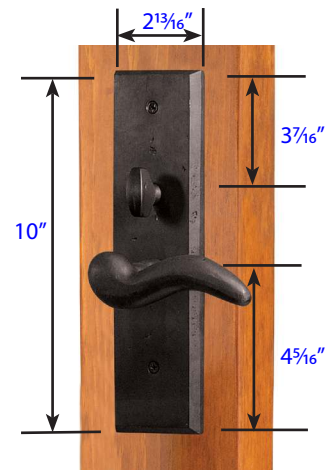

Standard interior trim
Part # UL 3325 & 3326


Additional Dimensions: (Part # UL 3325 & 3326)

- Exterior Projection is 3 1/8"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 3/4"
- Clearance between door & grip is 1 3/4"
- Plates thickness: 1/2"

Same dimensions for dummy function



Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 5/8" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • 2 3/4" TD Requires 2" Threaded Cylinder

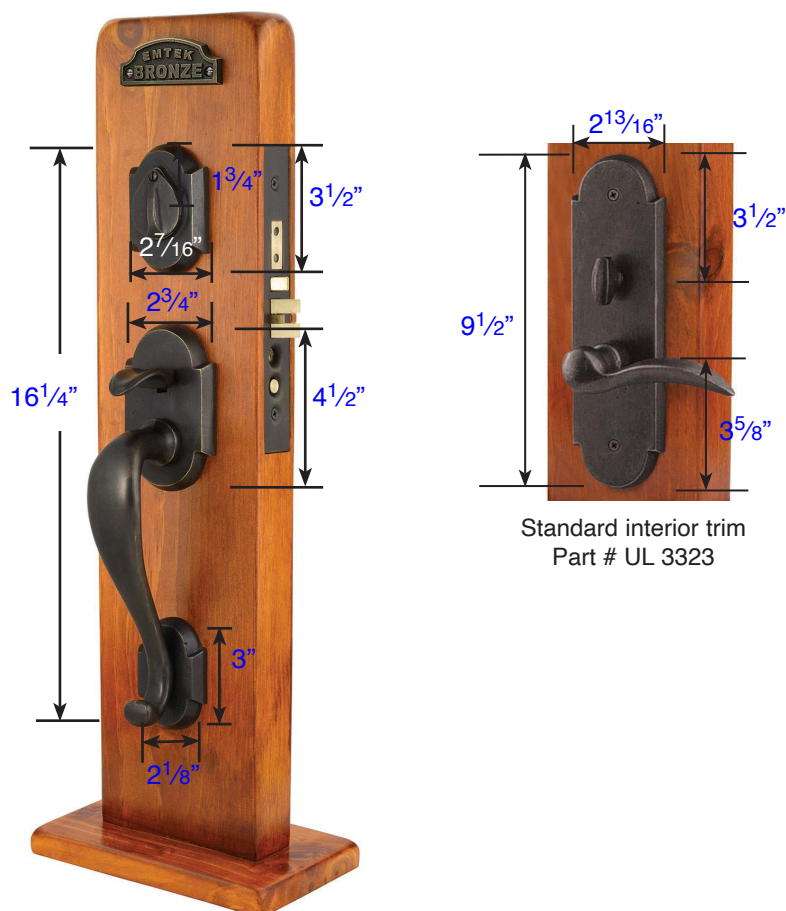

Denver
Trim Style
Part # UL 3323


Additional Dimensions: (Part # UL 3323)

- Exterior Projection is 3"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1"
- Clearance between door & grip is 1 1/2"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 5/8" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • 2 3/4" TD Requires 2" Threaded Cylinder

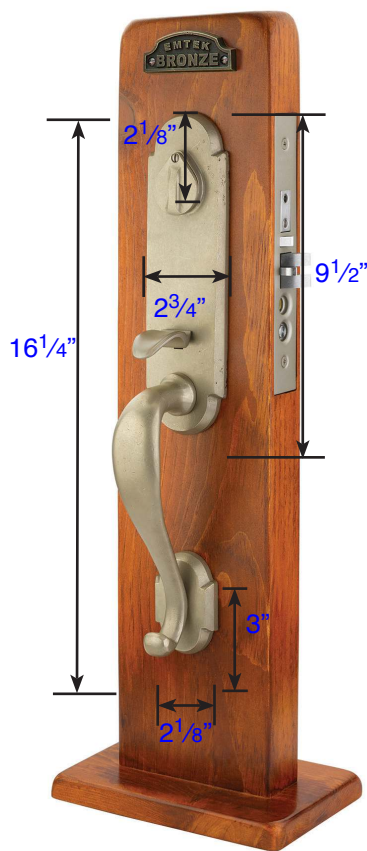

Cheyenne
Trim Style
Part # UL 3321



Topeka
Trim Style
Part # UL 3322

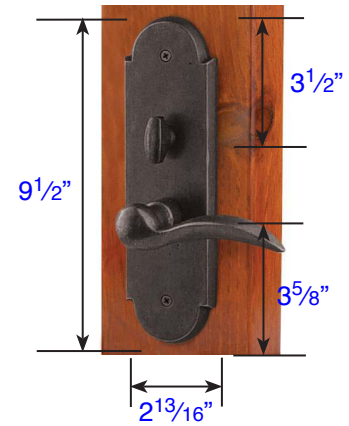

Standard interior trim
Part # UL 3321 & 3322


Additional Dimensions: (Part # UL 3321 & 3322)

- Exterior Projection is 3 1/8"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 3/4"
- Clearance between door & grip is 1 3/4"
- Plates thickness: 1/2"

Same dimensions for dummy function




Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1-1/2" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 5/8" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • 2 3/4" TD Requires 2" Threaded Cylinder

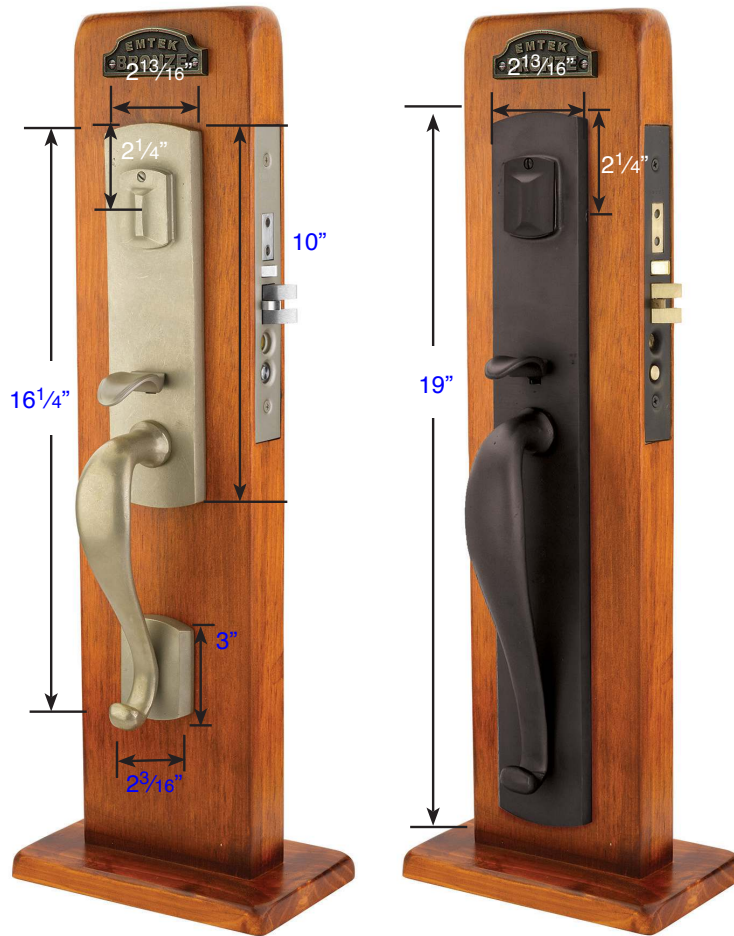

Morgan
Trim Style
Part # UL 3327

Rockford
Trim Style
Part # UL 3328
DISCONTINUED

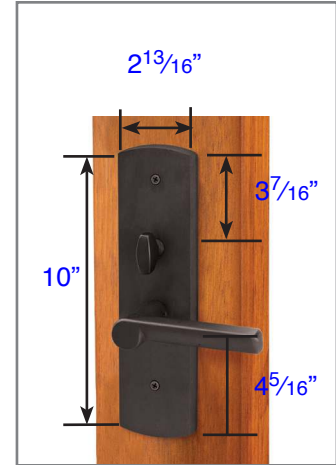

Standard interior trim
Part # UL 3327 & 3328


Additional Dimensions: (Part # UL 3327 & 3328)

- Exterior Projection is $3 \frac{1}{8}$ "
- Interior Projection Depends on Handle Style
- Overall Grip thickness: $1 \frac{3}{4}$ "
- Clearance between door & grip is $1 \frac{3}{4}$ "
- Plates thickness: $\frac{1}{2}$ "

Same dimensions for dummy function



Door Thickness Specifications		
Standard Door Thickness: $1 \frac{3}{4}$" Standard Components: • $1 \frac{3}{8}$" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • $1 \frac{1}{2}$" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: $1 \frac{7}{8}$" - $2 \frac{1}{4}$" Extended Components: • $1 \frac{1}{2}$" Threaded Cylinder • 2" Long Spindle • $2 \frac{1}{2}$" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: $2 \frac{3}{8}$" - $2 \frac{5}{8}$" Extended Components: • $1 \frac{3}{4}$" Threaded Cylinder • $2 \frac{1}{4}$" Long Spindle • $2 \frac{1}{2}$" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • $2 \frac{3}{4}$" TD Requires 2" Threaded Cylinder

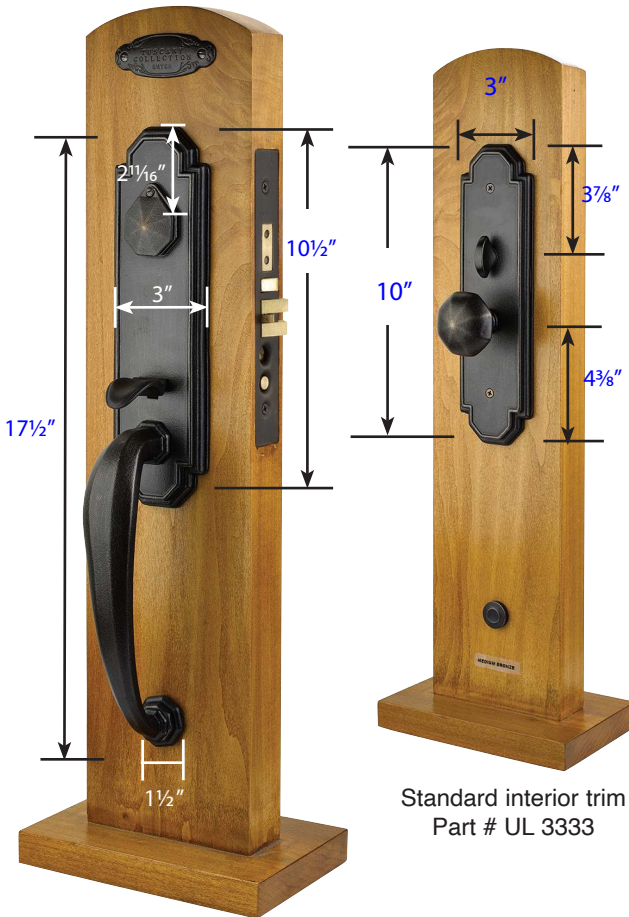

Standard interior trim
Part # UL 3333

Octagon
Trim Style
Part # UL 3333


Additional Dimensions: (Part # UL 3333)

- Exterior Projection is 3 1/16"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 2 1/8"
- Clearance between door & grip is 1 1/16"
- Plates thickness: 1/2"

Same dimensions for dummy function



Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8"- 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8"- 2 5/8" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • 2 3/4" TD Requires 2" Threaded Cylinder

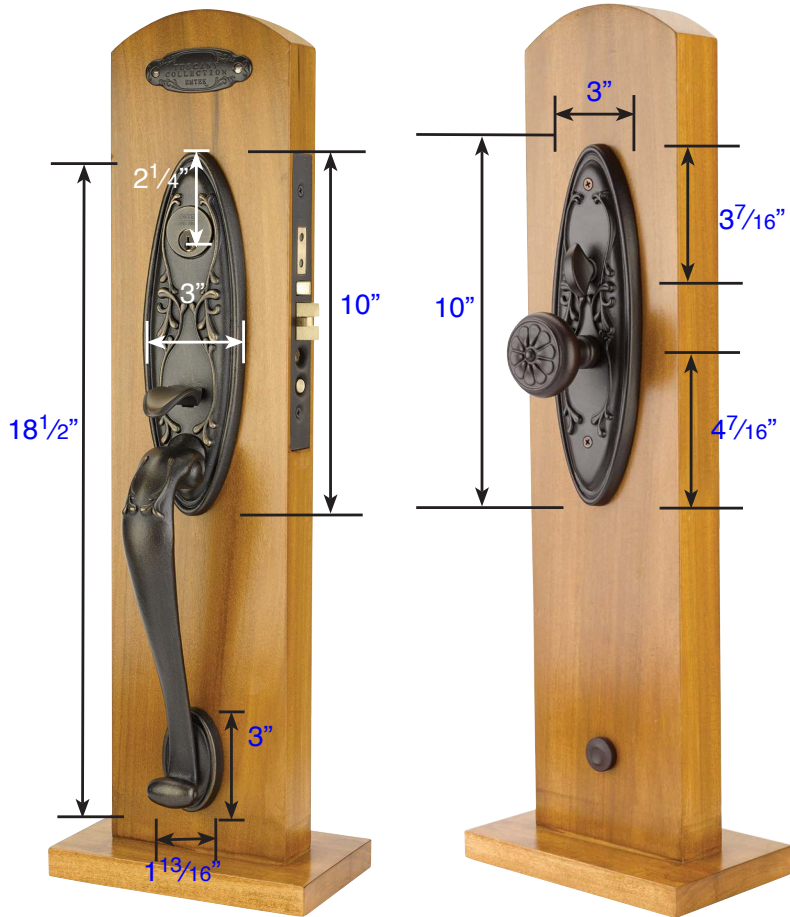

Da Vinci
Trim Style
Part # UL 3331

Standard interior trim
Part # UL 3331

Additional Dimensions: (Part # UL 3331)

- Exterior Projection is 3 ⁹/₃₂"
- Interior Projection Depends on Handle Style
- Overall Grip thickness: 1 ¹/₁₆"
- Clearance between door & grip is 1 ⁷/₈"
- Plates thickness: 1 ¹/₁₆"

Same dimensions for dummy function



Door Thickness Specifications		
Standard Door Thickness: 1 3/4" Standard Components: • 1 3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1 1/2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 1 7/8" - 2 1/4" Extended Components: • 1 1/2" Threaded Cylinder • 2" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate	Extended Door Thickness: 2 3/8" - 2 5/8" Extended Components: • 1 3/4" Threaded Cylinder • 2 1/4" Long Spindle • 2 1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • 2 3/4" TD Requires 2" Threaded Cylinder