


DO NOT SCALE

Strike Mortise $\frac{3}{32}$ (2.4) Deep

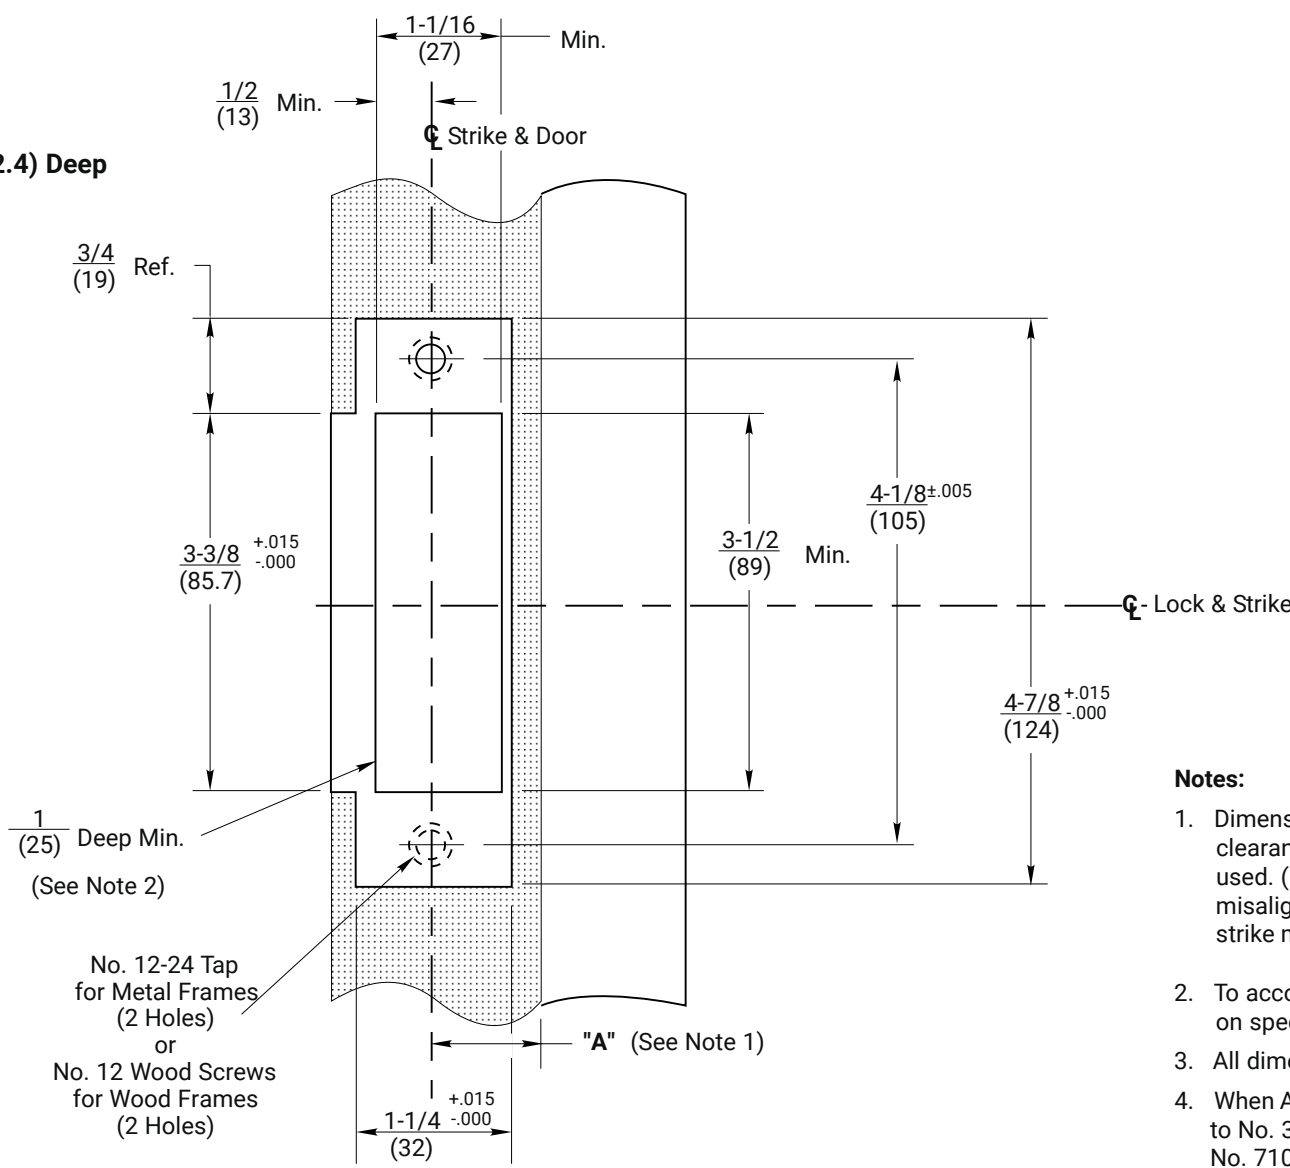

- Notes:**
1. Dimension "A" = 1/2 door thickness **plus** clearance for silencers or gasketing when used. (Failure to provide clearance will cause misalignment of lock and strike, requiring strike modifications.)
 2. To accommodate No. 202 Strike Box supplied on special order only.
 3. All dimensions given in inches (mm).
 4. When ANSI A115.2 (Fig. 2) is specified, refer to No. 371 / 495 Strikes, Template No. 7102-0005.

Experience a safer
and more open world

Copyright © 1996, 2023, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

497 Strike (ANSI A115.2, FIG. 1)
Wood Door or H.M. Frame Preparation
Used with Cylindrical Locks
1-855-557-5078 Ext. 2 www.accentra-assaabloy.com

Template Number:
7102-0003
Date: 05/24
Sheet: 1 of 1

ACCENTRA
ASSA ABLOY