

Experience a safer and more open world

4700LN SERIES

ANSI/BHMA Grade 1 Certified Cylindrical Lever Locks



ACCENTRA®

TABLE OF CONTENTS

Contents

Features & Specifications	3
Finishes & How To Order	4
Lever Trim	5
Functions	
Electrified Options	
Electrified Accessories	
Cylinders	11
Cylinders/Keying	
Latchbolts	
Strikes	14

4700LN Series Cylindrical Lever Locks

ASSA ABLOY ACCENTRA® 4700LN cylindrical locks are the ideal choice for a wide variety of commercial applications where consistent quality, ease of use and installation are required at an economical price. The 4700LN Series is certified to ANSI/BHMA Grade 1 standards and is UL fire-listed for all functions ensuring reliability and peace of mind.



This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.



FEATURES & SPECIFICATIONS

Features

- · Available in 19 functions, 5 lever designs, and 9 finishes
- · Knurled lever designs available
- Freewheeling trim
- Available with Microshield® antimicrobial coating



Specifications

Door Thickness	1-3/4" (44mm) to 2" (51mm); 1-3/8" (35mm) or 2-1/4" (57mm), please specify on order
Strike	ANSI 4-7/8" x 1-1/4" x 1-1/4" (124mm x 32mm x 32mm) lip to center. See page 14 for optional strikes.
Backset	2-3/4" (70mm)
Handing	Non-handed
Installation	ANSI/SDI A250.14
ANSI/BHMA	Certified ANSI/BHMA A156.2, Series 4000 Grade 1
Warranty	5 year

Applications and Listings

- UL cUL listed for use on fire doors having a rating up to and including 3 hours
- · Windstorm certified refer to local codes
- Meets accessibility guidelines for the Americans with Disabilities Act and the requirements of the Uniform Federal Accessibility Standards and ANSI 117.1

Note: Any retrofit or other field modification to a fire-rated opening can potentially impact the fire-rating of the opening, and ASSA ABLOY ACCENTRA® makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.









FINISHES



^{1.} Cylinders provided in these finishes only.

Note: Dark Oxidized Satin Bronze, Oil Rubbed (613) and Black Oxidized Bronze, Oil Rubbed (722) finishes are available by Special Product Application Request only. Contact customer service for more information.

*Finish available with MicroShield® antimicrobial coating, additional finishes by special application. Consult factory for availability.

MicroShield coating may vary finish color from architectural standards. MicroShield is not intended as a substitute for traditional infection control programs such as hand hygiene or use of disinfectants. Coated products must still be cleaned to ensure the surfaces will be free of destructive microbes. ASSA ABLOY ACCENTRA® makes no representations or warranties, express or implied, as to the efficacy of MicroShield.

How To Order

Trim Design	Function	Hand	Latch	Strike	Cylinder	Door Thickness	Finish
See page 8	See pages 5-7	See page 3	See page 13	See page 14	See pages 11-12	See page 3	See page 4

Ordering Example

Trim Design	Function	Hand	Latch	Strike	Cylinder	Door Thickness	Finish
AU	4707LN	RH	694	497	1803-47L	1-3/4"	626

ASSA ABLOY

LEVER TRIM

Augusta AU

Lever: Cast Zinc **Rose:** Wrought Brass








Monroe MO

Lever: Cast Zinc **Rose:** Wrought Brass









(133mm)


Pacific Beach PB

Lever: Cast Zinc **Rose:** Wrought Brass









TB


Lever: Cast Zinc **Rose:** Wrought Brass














UB

Lever: Cast Zinc **Rose:** Wrought Brass





a Available with large and small format interchangeable core. See page 11-12 for details.

Dimensions shown are in inches (mm).



4701LN (F75) 4702LN (F76A) 4703LN (F77A) 4704LN (F82A) **Patio or Privacy Lock** Passage or Closet Latch Privacy, Bedroom or Bath Lock **Entry Lock** · For doors that do not require · For lavatory or other privacy For exit doors with limited entry. For entrance or office doors. Deadlocking latchbolt. Deadlocking latchbolt. lockina. doors. · Either lever operates latchbolt · Either lever operates latchbolt Either lever operates latchbolt · Either lever operates latchbolt at all times. unless outside lever is locked by unless outside lever is locked (except when outside lever is locked from inside).* pushbutton inside.* by pushbutton inside.* Button automatically releases Button automatically releases Pushing button in inside lever when inside lever is turned or when inside lever is turned or locks outside lever. (Automatically door is closed. door is closed. releases when inside lever is · Emergency key inserted and Inside lever always active. turned or key is rotated in locked turned in hole in outside lever outside lever.) will unlock door from outside. Latchbolt is operated by key in (Emergency key furnished with outside lever or by rotating inside lockset. P/N 14-5302-1053-048) lever. · Inside lever always active. · Inside lever always active. Outside Inside Outside Inside Outside Inside Outside Inside 4705LN (F86) 4706LN (F92) 4707LN (F109) 4708LN (F84) Service Station Lock Storeroom or Closet Lock **Entry Lock** Classroom Lock For use on storeroom, utility, Deadlocking latchbolt. · For entrance, general home or · For classroom or utility room exit doors. Either lever operates latchbolt. office doors. doors. Pushbutton in inside lever locks · Deadlocking latchbolt. Deadlocking latchbolt. · Deadlocking latchbolt. Latchbolt operated by lever outside lever. (Automatically · Either lever operates latchbolt · Either lever operates latchbolt (except when outside lever is inside, key in outside lever. releases when inside lever is (except when outside lever is Outside lever always locked.* turned, door is closed or key is locked from inside).* locked by key).* rotated in outside lever, except Inside lever always active. Pushing turn button in inside Inside lever always active. when slotted pushbutton is lever locks outside lever. · Key releases outside lever. rotated 90° clockwise to retain (Automatically releases when outside lever in locked position.)* inside lever is turned or key is Latchbolt operated by key in rotated in locked outside lever.) outside lever, inside lever always Outside lever may be retained active. in locked position by pushing and rotating turn button 90° clockwise to a horizontal position; not released until turn button is manually returned to the vertical position. Latchbolt is operated by key in outside lever or by rotating inside Inside lever always active. Inside Inside Outside Outside Inside Outside Outside Inside

^{*} Lever handles are Free-Wheeling in locked position. Shaded area denotes FreeWheeling lever.

FUNCTIONS

4709LN (F89)	4718LN (F110)	4721LN (F80)	4722LN (F90)
Exit Latch For exit doors with no-entry desired. Deadlocking latchbolt. Outside lever always locked.* Inside lever always active.	Intruder Classroom Lock For classroom doors. Deadlocking latchbolt. Either lever operates latchbolt (except when outside lever is locked by key from either side). Outside lever remains locked upon egress Inside lever always active. (NOTE: Not available with I.C. core cylinders.)	Communicating Lock For communicating or store entrance doors. Deadlocking latchbolt. Either lever operates latchbolt (except when key in either lever locks or unlocks the lever independently of the other).* Should be used only in offices or rooms with multiple entries. (NOTE: Not available with I.C. core cylinders.)	Corridor Lock Deadlocking latchbolt. Either lever operates latchbolt (except when outside lever is locked by inside push-button or key in outside lever). Inside lever always active. When locked by button, the button automatically releases when inside lever is turned or door is closed. When locked by key, the automatic release is made inoperative and must be manually unlocked by key.
Outside Inside	Outside Inside	Outside Inside	Outside Inside
Privacy Lock For lavatory or other privacy doors. Either lever operates latchbolt (except when outside lever is locked by inside pushbutton).* Button automatically releases by turning inside lever or closing door. Door can be unlocked, when necessary, by operating outside turnbutton. No emergency key required. Optional flush turnbutton available for outside. Specify option "FTB".	Communicating Passage Lock For twin communicating or exit doors where one side operation is required. Also when space is limited between door and switch panel. Deadlocking latchbolt. One lever operation. Blank rose. Should be used only where rooms have more than one entrance.	Communicating Classroom Lock For twin communicating or closet doors where one side operation is required or space between doors is limited. Deadlocking latchbolt. Inside lever operates latchbolt except when lever is locked by key.* Blank rose. Should be used only where rooms have more than one entrance. (NOTE: Not available with I.C. core cylinders)	Utility, Asylum or Institutional Lock Deadlocking latchbolt. Latchbolt operated by key in lever from either side. Both levers always locked.* Note: Not available with IC core cylinders.
Outside Inside	Outside Inside	Outside Inside	Outside Inside

^{*} Lever handles are Free-Wheeling in locked position. Shaded area denotes FreeWheeling lever.

FUNCTIONS

4739LN (F112)	4755LN	4755LN-D
Communicating Storeroom Lock For twin communicating or closet doors where one side operation is required or space between doors is limited. Deadlocking latchbolt. Latchbolt operated by key only in inside lever. Inside lever always locked.* Blank rose. Should be used only where rooms have more than one entrance. (Note: Not available with I.C. core cylinders)	Single Dummy Trim For non-operational levers used for decorative trim. Rigid lever.	Pouble Dummy Trim For non-operational lever used for decorative trim. Through-bolted.
Outside Inside	Outside Inside	Outside Inside

^{*} Lever handles are Free-Wheeling in locked position. Shaded area denotes FreeWheeling lever.

ELECTRIFIED OPTIONS

Operation

Electric locks provide the ability to electrically lock or unlock the outside trim from a remote location. Fail Safe locks are commonly used in stair towers to release upon fire alarm activation. Fail Secure locks are used on perimeter doors or security doors to allow ingress using access control technologies (proximity cards, keypads, etc.)



Features

- · Free Wheeling lever mechanism.
- Self-contained, continuous-duty integral solenoid (allows installation in standard cylindrical prep).
- · Available Fail Safe or Fail Secure.
- Available in 12 or 24 volts DC.
- External rectifier available upon request for AC operation.
- · Mechanical cylinder override.
- · All 4700LN cylinder options.
- Certified ANSI/BHMA Grade 1. BHM
- · UL listed.
- 1-year limited warranty.

Electrical Specifications

 Continuous duty solenoid 150 mA @ 24VDC 300 mA @ 12VDC

ElectroLynx®

Electrified 4700LN locks are equipped with ElectroLynx connectors. As a standard feature, these connectors link power from the incoming source to electrified locking products, including hinges, locks, exit devices, magnetic holders and strikes.



· Latchbolt retracted by key when

power is off.



Functions

Outside Inside	Function	Function Description
	4790LN	Fail Safe Deadlocking latchbolt by lever either side except when power on locks outside lever. Power off/unlocks outside lever. Inside lever always free. Latchbolt retracted by key when power is on.
	4791LN	Fail Secure Deadlocking latchbolt by lever either side except when power off locks outside lever. Power on/unlocks outside lever. Inside lever always free.

Outside Inside	Function	Function Description
	4780LN	Pail Safe Deadlocking latchbolt by lever either side except when power on locks outside lever. Power off/unlocks outside lever. Inside lever always free.
	4781LN	Pail Secure Deadlocking latchbolt by lever either side except when power off locks outside lever. Power on/unlocks outside lever. Inside lever always free.

ACCENTRA®

ELECTRIFIED OPTIONS

LSP-12-24 POWER SUPPLY

Operation

LifeSafety Power supplies are designed to provide reliable filtered and regulated power for long life to a variety of electrified hardware components.

Features

- Selectable voltage output between 12V and 24V with a single switch
- Internal Back-Up battery charging circuit *
- Regulated and filtered, fuse protected outputs
- · Each output can be individually turned on and off via a jumper
- · Power status of each output is shown by an LED
- Rugged steel enclosure
- Fire alarm interface included Dry contacts NO/NC, 9-33VDC, 3-15mA

Electrical Specifications

- Inputs: 120VAC
- Outputs: 12VDC @ 6 Amp or 24VDC @3 Amp
 - 8 Total Outputs

Listings

- UL294, UL603, UL1076
- ULC S318, ULC S319

Applications

- Fail safe cylindrical locks
- · Fail secure cylindrical locks

^{*} Note: Batteries are not included with the power supply

Model	Description
LSP-12-24	12V - 6AMP / 24V - 3AMP Power Supply

ASSA ABLOY ACCENTRA® recommends McKinney®, Pemko and Securitron® for power transfer devices and other electronic accessories.




CYLINDERS


Cylinder Options

The following selection guide indicates the correct cylinder for each locking segment.

Lo	ckset Series:	Types of Cylinder Mechanisms						
4700LN		Conven	tional	Protected	l Keyway	Secu	ırity	
"	Fixed Core	6-pin	7-pin	6-pin	7-pin	6-pin	7-pin	
Types	Key-In-Lever	1803-47L*	N/A	K403-47L*	N/A	5803-47L*	N/A	
der T	Interchangeab	le Core						
Cylinder	LFIC	1210	N/A	K800	N/A	5210	N/A	
	SFIC	A600	A600	K600	K600	N/A	N/A	



^{*}Cylinders require cylinder sleeve P/N 14-1803-9001-999 to fit locksets manufactured prior to January 2022.

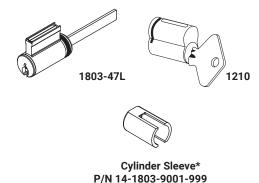

ASSA ABLOY ACCENTRA® KeyMark®

For those applications requiring protected key control, ASSA ABLOY ACCENTRA® KeyMark® cylinders guard against unauthorized key duplication. The ASSA ABLOY ACCENTRA® KeyMark® Security Leg® keyway feature increases




resistance against picking and impressioning and can easily retrofit into existing systems. For further details and availability, refer to the separate ASSA ABLOY ACCENTRA® KeyMark® catalog.

108S Schlage® Cylinder Adapter Kit

Kit used to modify Schlage® cylinder for fit in the 4700LN. P/N 14-5305-0090-048 - 108S


Kit includes tailpiece and sleeve. To order the 108S adapter kit with the lock, use an "S" prefix (i.e., S-AU4707LN).

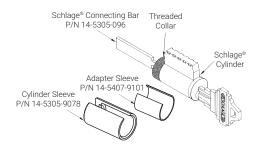

Security Cylinders

Security cylinders contain two independent locking mechanisms. The first is a traditional 6-pin tumbler mechanism with spool drivers for greatly increased picking resistance.

The second is an innovative 5-tumbler rotating disc mechanism with sidebar engagement. The rotating discs are spring loaded and block the bottom of the keyway.

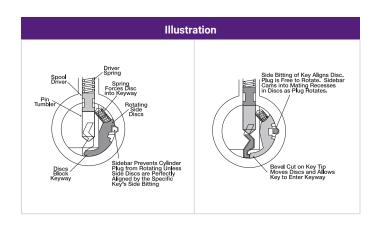



Other Manufacturer Keyway Cylinder/Cores

Illustration	Description	Lever	Number of Pins
(ACOESTIVE)	Best® Keyway Core. Available keyed random, master keyed or uncombinated. Specify keyway A, B, C, D, E, F, G, H, J, K, L or M.	A600	6 or 7 (Specify)
	Schlage® C Keyway Cylinder. Available 0-bitted or keyed random.	2803-47L x C	6
	Corbin Russwin L4 Keyway Cylinder. Available keyed random.	3803-47L x L4	6
	Corbin 60 Keyway Cylinder. Available keyed random.	3803-47L x 60	6
	Russwin D1 Keyway Cylinder. Available keyed random.	3803-47L x D1	6
Lever Cylinder	Sargent® LA Keyway Cylinder. Available keyed random.	3803-47L x LA	6
	Schlage® E Keyway Cylinder. Available keyed random.	3803-47L x E	6

Notes: The 2803 and 3803 cylinders require a cylinder sleeve (P/N 14-1803-9001-999) to fit 4700LN locksets manufactured prior to January 2022.

Levers Accepting SFIC And Other Manufacturers' Large Format Interchangeable Cores

Illustration	Description	Prefix	Number of Pins
	SFIC (Accepts all Small Format Interchangeable Cores)	B (i.e. B-AU, B-MO, B-PB, B-TB, B-UB)	6 or 7
	Medeco®, ASSA® (LFIC)	M* (i.e. M-AU)	6
	Schlage® (LFIC)	SI (i.e. SI-AU, SI-PB)	6

^{*}Medeco®, ASSA® option available only with AU lever. (Note: For Medeco 32 series cores.)

LFIC = Large Format Interchangeable Core

SFIC = Small Format Interchangeable Core


Levers Accepting Other Manufacturers' Fixed Core Cylinders

Illustration	Description	Prefix	Number of Pins
	Schlage®	S (i.e. S-AU, S-MO, S-PB)	6

LATCHBOLTS

Plain Latchbolts

Model No. 693 supplied standard with all 4700LN series locksets without locking function. Standard plain latchbolt has a 2-1/4" (57mm) x 1-1/8" (29mm) beveled front with a 2-3/4" (70mm) backset and a 1/2" (13mm) bolt throw. Optional latchbolts with a greater backset/throw available to special order.




Model No.	Front	Backset	Throw	Front Width	Latch Diameter
693	Beveled	2-3/4" (70mm)	1/2" (13mm)	1-1/8" (29mm)	1" (25mm)
F693	Flat	2-3/4" (70mm)	1/2" (13mm)	1-1/8" (29mm)	1" (25mm)
3693	Beveled	3-3/4" (95mm)	1/2" (13mm)	1-1/8" (29mm)	1" (25mm)

Note: for 3/4" throw applications, only deadlocking latchbolts available.

Deadlocking Latchbolts

Deadlocking latchbolt Model No. 694 supplied standard with all 4700LN series locksets with mechanical locking function. E694 is the standard latch provided for electrified functions. Standard deadlocking latchbolt has a 2-1/4" (57mm) x 1-1/8" (29mm) universal front with a 2-3/4" (70mm) backset and a 1/2" (13mm) bolt throw. Optional latchbolts with a greater backset/throw available to special order.




Model No.	Front	Backset	Throw	Front Width	Latch Diameter
694	Adjustable	2-3/4" (70mm)	1/2" (13mm)	1-1/8" (29mm)	1" (25mm)
E694	Adjustable	2-3/4" (70mm)	1/2" (13mm)	1-1/8" (29mm)	1" (25mm)
3694	Beveled	3-3/4" (95mm)	1/2" (13mm)	1-1/8" (29mm)	1" (25mm)
480B	Beveled	2-3/4" (70mm)	3/4" (19mm)	1-1/8" (29mm)	1" (25mm)
F480B	Flat	2-3/4" (70mm)	3/4" (19mm)	1-1/8" (29mm)	1" (25mm)
3480B	Beveled	3-3/4" (95mm)	3/4" (19mm)	1-1/8" (29mm)	1" (25mm)

Note: for 2-3/8" backset, contact Customer Support.

Backset Extension Links

All 4700LN Series locksets are supplied with standard latchbolts of 2-3/4" (70mm) backset; optional latchbolts with a 3-3/4" (95mm) backset are available to special order for lever locksets only. Extension links are also available for attachment to 2-3/4" (70mm) or 3-3/4" (95mm) backset latchbolts to extend the backset to the desired length.

Desired Backset	Latchbolt Backset	Order Extension List No.
5" (127mm)	2-3/4" (70mm)	481DL
6" (152mm)	3-3/4" (95mm)	481
7" (178mm)	2-3/4" (70mm)	482
8" (203mm)	3-3/4" (95mm)	482
18" (46cm)	2-3/4" (70mm)	484
19" (48cm)	3-3/4" (95mm)	484



Other extension links up to 42" (1.06m) backset are available to special order.

Attaching Screws

(Not regularly supplied when latchbolts ordered separately).

· For all latchbolts

 $\#8-32 \times 3/4$ " (19mm) Phillips flat head combination wood and machine screws

Brass - P/N 81-2022-0416*

Bronze - P/N 81-2032-0416*

· Hollow Metal Doors


#8-32 x 1" (25mm) Phillips flat head machine screw Brass - P/N 81-0022-0420*

Bronze - P/N 81-0032-0420*

^{*}Specify finish required.

STRIKES

4700LN locks are available with a variety of strike options. All strikes are located on the same vertical and horizontal center lines as the latchbolt. Some strikes are available in a variety of lip lengths to accommodate varying thickness of doors and frames. To determine the proper length of the lip, measure from the center line of the strike to the edge of the jamb, accounting for any interfering trim (i.e. wood molding) and then add 1/4" (6mm) for curved lip. All strikes are reversible. Strikes are fabricated of either brass, bronze or stainless steel, depending on the lockset trim finish. When ordering strikes separately, specify the finish required.

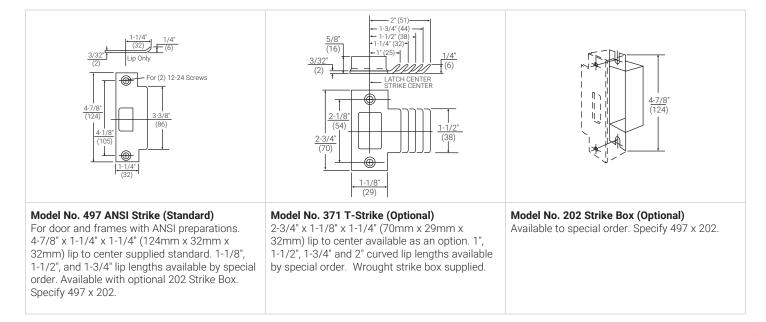

Attaching Screws

(Not regularly supplied when strikes ordered separately).

For Model No. 497

 $\#12-24 \times 1$ " Phillips flat head combination wood and machine screws. P/N 81-2012-0620

For Model No. 371

 $\#8-32 \times 3/4$ " (19mm) Phillips flat head combination wood and machine screws. P/N 81-2012-0416



NOTES

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.



TECHNICAL SUPPORT

(troubleshooting, product use and application, returns) Tel: 855-557-5078

Email: techsupport.accentra@assaabloy.com

CUSTOMER SUPPORT

(orders, product configuration, pricing, lead-time) Tel: 855-557-5078 x2

Email: <u>Customerservice.Accentra@assaabloy.com</u>

U.S.A.:
ASSA ABLOY ACCENTRA®
225 Episcopal Road
Berlin, CT 06037-4004
Tel: 1-800-438-1951
Fax: 1-800-338-0965
www.accentra-assaabloy.com

Canada:
ASSA ABLOY Door Security Solutions Canada
160 Four Valley Drive
Vaughan, Ontario L4K 4T9
Tel: 1-800-461-3007
Fax: 1-800-461-8989
assaabloydss.ca

International: ASSA ABLOY Americas International Tel: 1-905-821-7775 Fax: 1-905-821-1429 assaabloyai.com