

Applies to the following product:

355_S

Installation Instructions:



For use with bevel edge outswing or double-egress doors.

1. Measure, mark, and trim astragal to full length of door, leaving insert slightly longer than the metal at each end.

NOTE: For best seal, insert should touch header at top and threshold (or floor) at bottom.

2. Place astragal on active door (see figure below).
3. Secure in place with supplied screws.

Tools Required:

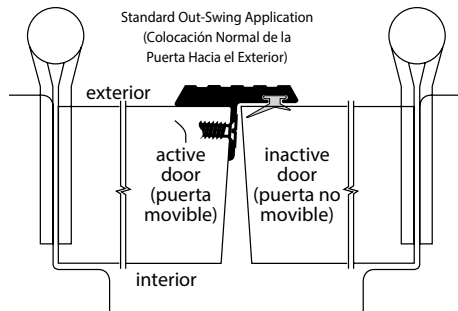

Testing/Ratings:

Gasketing material for fire doors intended for application to listed steel frames and/or classified steel covered composite type, and hollow metal type fire doors rated up to 3 hours; wood and plastic covered composite type fire doors rated up to 1-1/2 hours; and wood core type fire doors rated up to 20 minutes. (Thresholds may or may not contain gasketing material).

